

PRODUCT SPECIFICATIONS, WARRANTY, INSTALLATION INFORMATION

01-290-300 - ATMOX VENT COVER - EXTERNAL MOUNT - SOLID/OPEN

Specifications:

- Mount: Fits standard 16 x 8 inch vent opening
Mounts with 4 screws (included)
- Option: Solid plate can be removed to use as open grill.



LIMITED THREE-YEAR WARRANTY

When installed, operated, used and maintained as intended in residential applications and according to the instructions supplied with ATMOX products, ATMOX warrants its products for a period of 3-years from the date of purchase against any defects in material and workmanship. The products covered by this warranty include the control boxes, fans, sensors and wiring manufactured by ATMOX. ATMOX will repair or replace, at ATMOX's option, any ATMOX product or component found to be defective within the 3-year warranty period.

ATMOX products are designed to improve conditions in the crawlspace, basement or attic, yet are limited by atmospheric and natural conditions over which ATMOX has no control and which are not covered by this warranty. ATMOX products are not warranted against damage caused by electrical surges, fire or other casualty, vandalism, or acts of God (including lightning strikes and floods). This warranty does not make representations regarding mold, insects, termites, water, rot, electrical, HVAC, roof, framing, foundation, floors, drywall, gutters, ice dams or other problems that may occur in a house structure. The warranty does not include any costs of removal or reinstallation.

Third-party products by other manufacturers sold by ATMOX (such as dehumidifiers) are not covered by this warranty but may be covered under separate warranties by the product's manufacturer. Purchaser should contact third party manufacturers for warranty claims and coverage of third-party products not manufactured by ATMOX.

ATMOX INC'S LIABILITY UNDER THIS LIMITED WARRANTY IS STRICTLY LIMITED TO REPAIR OR REPLACEMENT OF DEFECTIVE ATMOX PRODUCTS. OTHER THAN THE WARRANTIES EXPRESSLY DESCRIBED HEREIN, ATMOX DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ATMOX WILL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Some states do not allow certain limitations and exclusions of warranty, so these exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

WARNING: Cancer and Reproductive Harm – For more information, go to www.P65Warnings.ca.gov


INSTALLATION INFORMATION

Tools needed for Installation:

- Flat Head Screwdriver
- Caulk gun with clear caulk

Installation Steps to Mount Inside Vent Opening:

- 1** Remove existing vent cover.
- 2** Insert the vent cover from the outside of the crawlspace into the opening and align in center. Make sure the vent cover is flush to the wall with no gaps around the edges.
- 3** Attach the vent cover by threading and tightening the 4 screws to the left and right to create tension between the vent opening and the vent cover.
- 4** To better hold the vent cover in place, use caulk to hold the vent cover in place by caulking around all four sides of the vent cover.

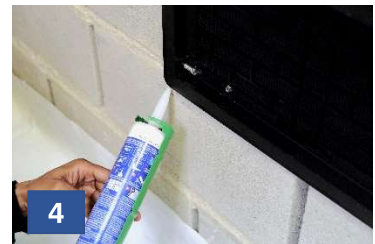

Tools needed:

- Screwdriver

Steps to Remove Solid Cover and Use as Open Vent Cover:

- 1** On back of vent cover, hold the nut in place.
- 2** On the front of the vent cover, use a screwdriver to loosen screw and remove nut.
- 3** Remove the solid plate.
- 4** Replace the screws and nuts into the vent cover to fill the holes.



ATMOX INC

10612-D Providence Rd. #229, Charlotte, NC 28277
Phone: 704-248-2858 www.atmox.com



Issue: 2021-09

© Copyright 2021 ATMOX INC